

HAWK-I

LED-48 DASH LIGHT

USER MANUAL

CONTENTS

-Main Unit-



-Flash-back Shield-



-Mounting Bracket-



Adhesive Pads



Screws



Suction Cups

Specifications:

Input Voltage: 12VDC
Current Draw: 0.24amps

ASSEMBLY



*Users have the option of choosing different locations for installation. The location will determine the type of mounting method used.

OPERATING GUIDE

Flash Pattern Selection

FP#	Flash Pattern	FP#	Flash Pattern
0	Random (default)	8	Quad (all)
1	Double (split)	9	Mega (all)
2	Quad (split)	10	Ultra (all)
3	Mega (split)	11	Single-Quad (all)
4	Ultra (split)	12	Single H/L (all)
5	Single-Quad (split)	13	Wig-Wag (split)
6	Single H/L (split)	14	Steady 2 (california)
7	Double (all)	15	Steady 4 (all)

*SPLIT=left LEDs alternate with right LEDs *ALL=all 4 LEDs on



WINDOW MOUNTING

First choose the location for mounting. Clean the surface of the windshield with alcohol to ensure a proper bond. Adjust the mounting bracket and press the Flashback Shield firmly against the windshield. Secure the dash light until the 3 suction cups have a firm hold. Once it's affixed to the windshield the Hawk-I LED dash is in operational mode.



NOTE: Due to various windshield angle, the Hawk-I LED dash mounting bracket can be adjusted for optimum fit.


VELCRO MOUNTING

For best effect, clean the surface of the Hawk-I LED dash and mounting surface with alcohol before applying adhesive pads.



OPTIONAL BRACKET MOUNTING

The standard bracket can be used to mount the Hawk-I LED dash in a variety of locations on a flat surface.

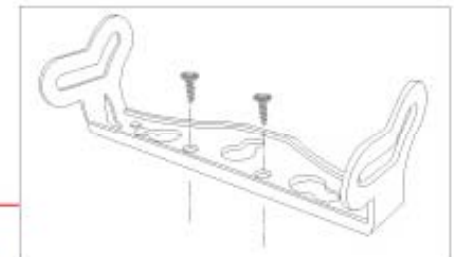

NOTE: Mounting screws not included!