

# LED DASH LIGHT      USER MANUAL

## CONTENTS

-Main Unit-



-Flash-back Shield-



-Mounting Bracket-



Adhesive Pads



Screws



Suction Cups

**Specifications:**

Input Voltage: 12VDC  
 Current Draw: 0.40amps

## ASSEMBLY



\*Users have the option of choosing different locations for installation. The location will determine the type of mounting method used.

## OPERATING GUIDE

**\*Flash Pattern Selection\***

FP#	Flash Pattern	FP#	Flash Pattern
0	Random (default)	8	Quad (all)
1	Double (split)	9	Mega (all)
2	Quad (split)	10	Ultra (all)
3	Mega (split)	11	Single-Quad (all)
4	Ultra (split)	12	Single H/L (all)
5	Single-Quad (split)	13	Wig-Wag (split)
6	Single H/L (split)	14	Steady 2 (california)
7	Double (all)	15	Steady 4 (all)

\*SPLIT=pairs of LEDs alternating      \*ALL=all 4 LEDs on



- PUSH BUTTON**
- push once for next flash pattern
  - push & hold for 3 seconds for previous flash pattern
  - push & hold for 5 second for default

## WINDOW MOUNTING

First choose the location for mounting. Clean the surface of the windshield with alcohol to ensure a proper bond. Adjust the mounting bracket and press the Flashback Shield firmly against the windshield. Secure the dash light until the 3 suction cups have a firm hold. Once it's affixed to the windshield the Micromax LED dash is in operational mode.



**NOTE:** Due to various windshield angle, the Micromax LED dash mounting bracket can be adjusted for optimum fit.

---

## VELCRO MOUNTING



For best effect, clean the surface of the Micromax LED dash and mounting surface with alcohol before applying adhesive pads.



---

## OPTIONAL BRACKET MOUNTING

The standard bracket can be used to mount the Micromax LED dash in a variety of locations on a flat surface.

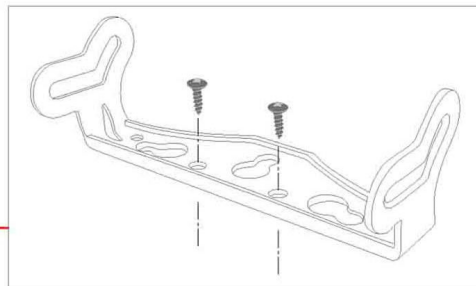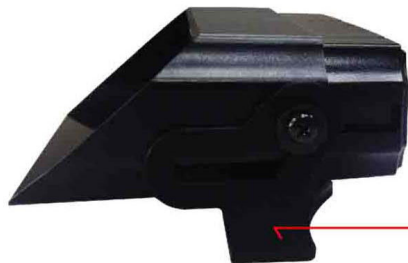

**NOTE:** Mounting screws not included!