


## Rearguard LED

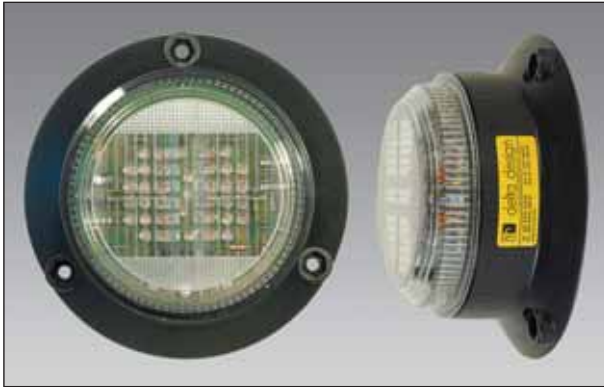

Certified to EMC directive 95/54.

CE – complies with EMC Directive 89/336/EEC.

High voltage transient and polarity reversal protection fitted.

Operating temperature: -20°C to +55°C.



Amber
497001

>80cd	75/min	triple flash	145mA	120mA	IP65	240gms

### Features:

Low profile directional LED beacon.

- Dual voltage 12/24V (10 – 30Vdc)
- High intensity directional hazard warning
- Up to 8 beacons may be connected to flash synchronously or alternately
- Clear lens with amber LEDs
- 12 months' guarantee

### Applications:

Suitable for many vehicle applications including utility, refuse trucks, street cleaners, delivery, recovery and large vehicles.

### Materials:

Polycarbonate lens, ABS base.

## Rearguard Xenon SQ4XDV/5 RG



Certified to EMC directive 95/54.

CE – complies with EMC Directive 89/336/EEC.

High voltage transient and polarity reversal protection fitted.

Operating temperature: -20°C to +55°C.



Amber	Blue	Red	Clear	Green
426002	426004	426003	426001	426005

>70cd (amber)	75/min	single flash	380mA	180mA	IP65	242gms

### Features:

Low profile directional Xenon beacon.

- Dual voltage 12/24V (10 – 30Vdc)
- High intensity hazard warning light
- Directional – all light transmitted in chosen direction
- Up to 8 beacons may be connected to flash synchronously or alternately
- 12 months' guarantee

### Applications:

Suitable for many vehicle applications including utility, refuse trucks, street cleaners, drain cleaners, agricultural, delivery, recovery and emergency services.

### Materials:

Polycarbonate lens, ABS base.

